

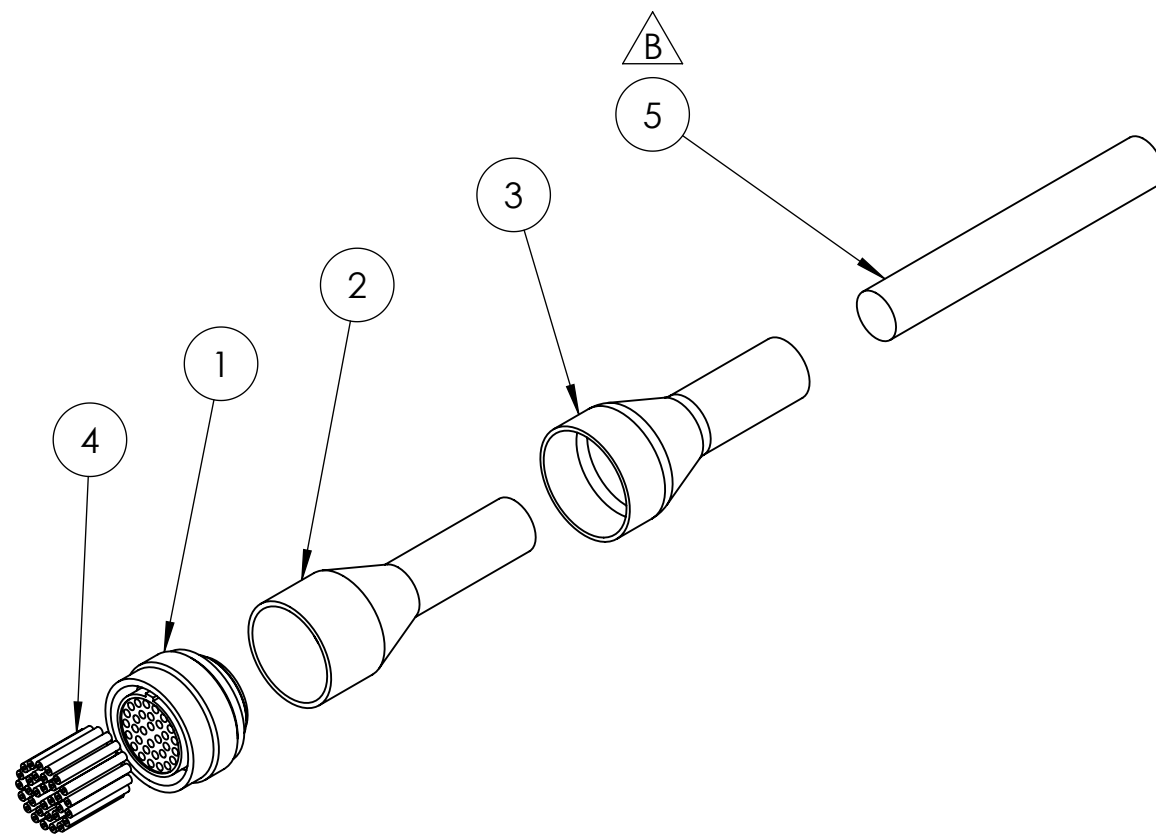


# Circuit diagram: E0240-130



Art.no.	L=
P8199-30	300mm
P8199-50	500mm

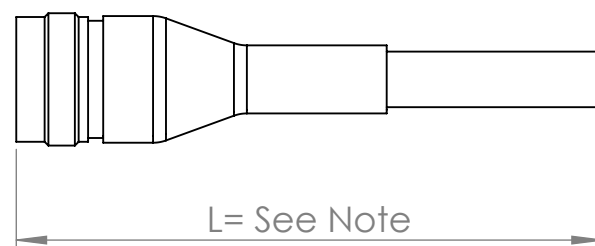

POS	ITEM No	DESCRIPTION	QTY.
1	I1086	Souriau connector compact 32S	1
2	I0485	Shield sock M18	1
3	52171070-2	Shrink boot	1
4	I0305	Socket	32
5	I1639	Signal cable 25x2x0,34mm2	1

Där ej annat angivits gäller / Unless otherwise stated the following applies:

Tolerans / Tolerance: ISO 2768-m

Ytjämnhet / Surface roughness: 6,3

Gradningsklass enligt / Burring class acc. to: 0,3x45°

Konstruerad av / Designed by: MTh 2016-11-24

Ändrad av / Changed by:

Godkänd av / Approved by: PA 2016-11-24



Skala / Scale

1:2

Vikt / Weight

0 kg

Format

A3

Material Ämne / Blank

Värme behandling / Heat treatment

Ytbehandling / Surface coating

Ritningsmått gäller efter ytbehandling / Meas. valid after coated surfaces

Benämning

32S Compact Souriau cable

Description

32S Signal cable

Filnamn / Filename

A0240-130A

Dokument nr. / Document no.

P8199-XX

Ändr. / Alt.

B

Blad / Sheet

1(1)