


We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products

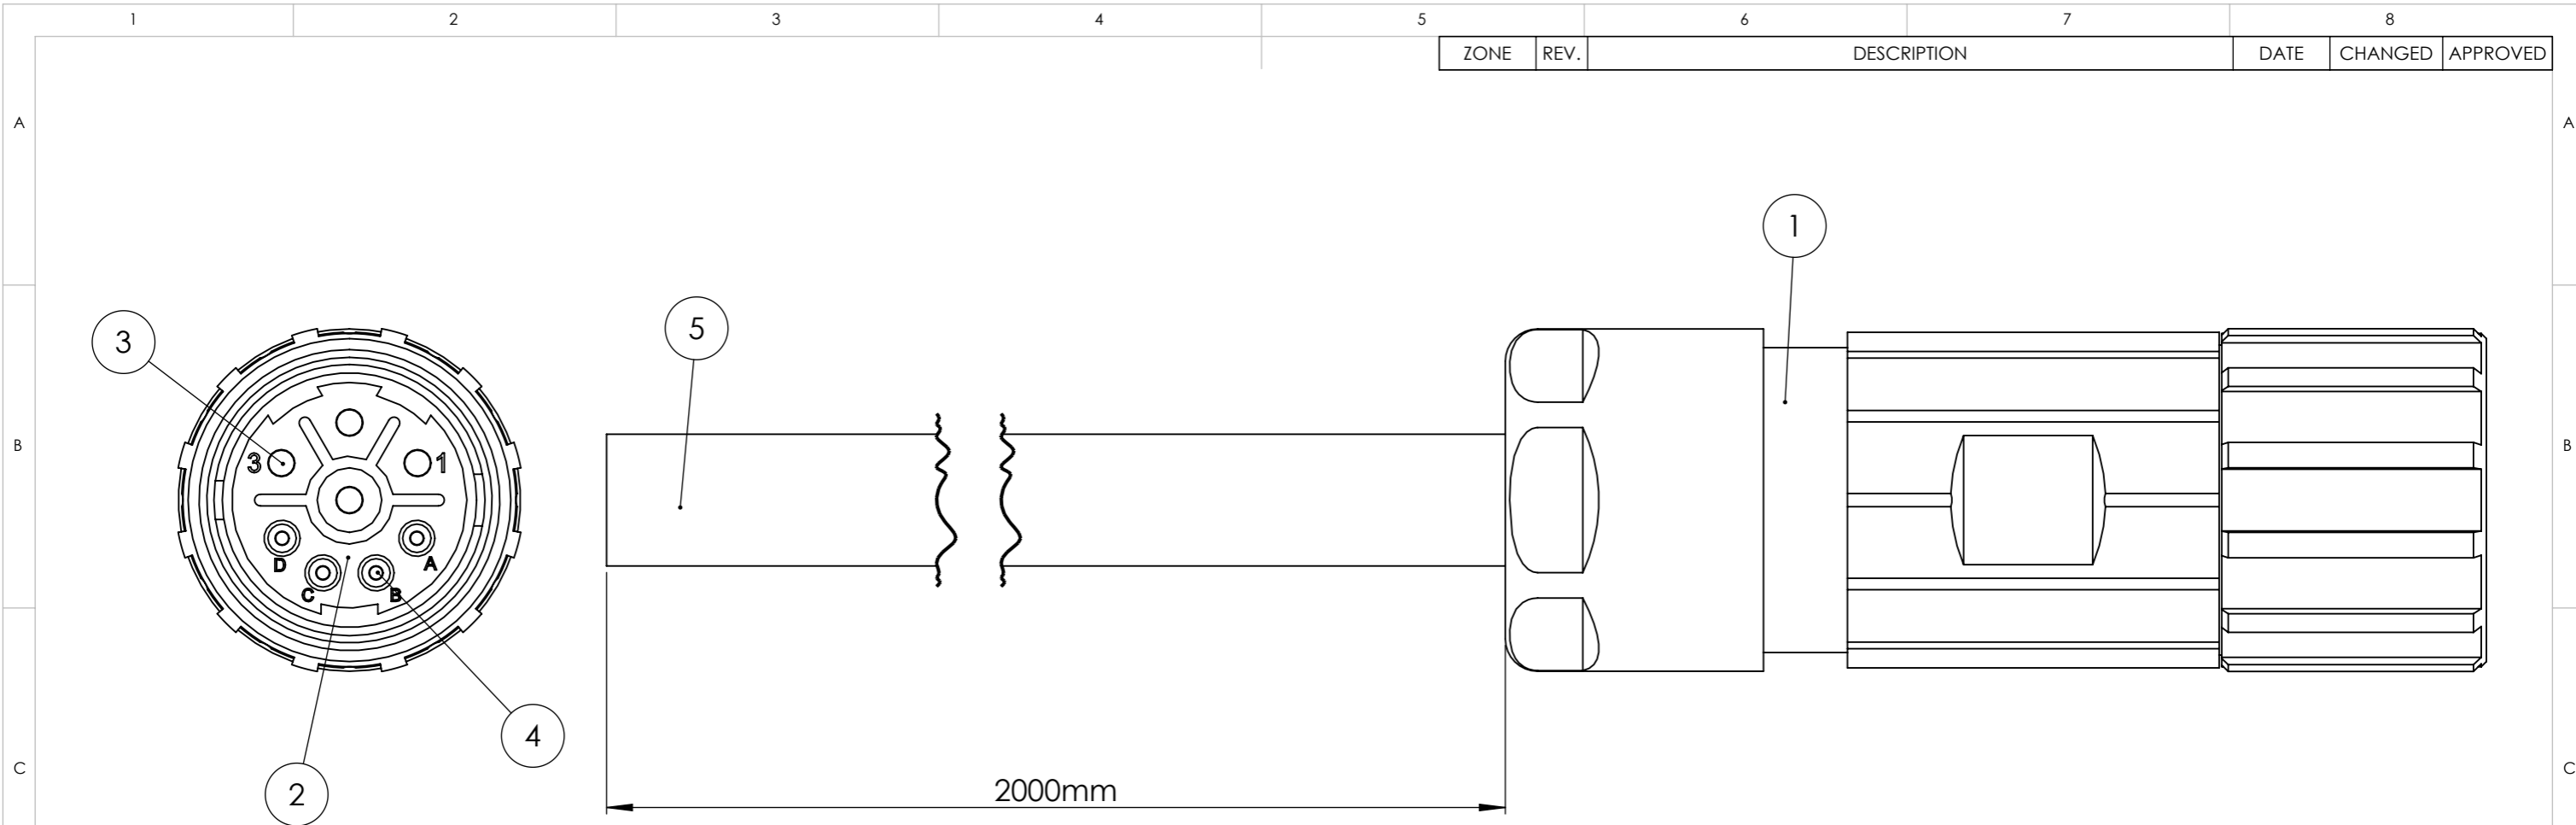

ZONE	REV.	DESCRIPTION	DATE	CHANGED	APPROVED
------	------	-------------	------	---------	----------

POS	ITEM No	DESCRIPTION	QTY.
1	I1087	Hummel Straight Female cable Connector	1
2	I0987	Insert 4x1 mm + 4x2mm pins, (without pins)	1
3	I0984	Servo Crimp-pin 2 mm, machined, 0,75-2,5 mm ²	4
4	I0989	Servo Crimp-pin 1 mm, machined, 0,14-1,0 mm ²	4
5	I0548	Cable 4x1,5 + 4x0,5mm ² L:2050	1

Unless otherwise stated the following applies:

Tolerance: _____

Surface roughness: _____

Burring class acc. to: _____

Measures valid after treatment / coating

Designed by: HN 2021-05-06

Approved by: ANFD

Material: _____

Heat treatment / Surface coating: _____

Circuit diagram: E0182-114

Filename: A0182-114

Scale: 2:1

Weight: 0.2

Format: A3

Description: 2m Signal/Power Cable to P1376

M23 fem. Thread 4+4p - free end

Item no.: P1387

Rev.: A

Sheet: 1(1)

