


Circuit diagram: E0214-205

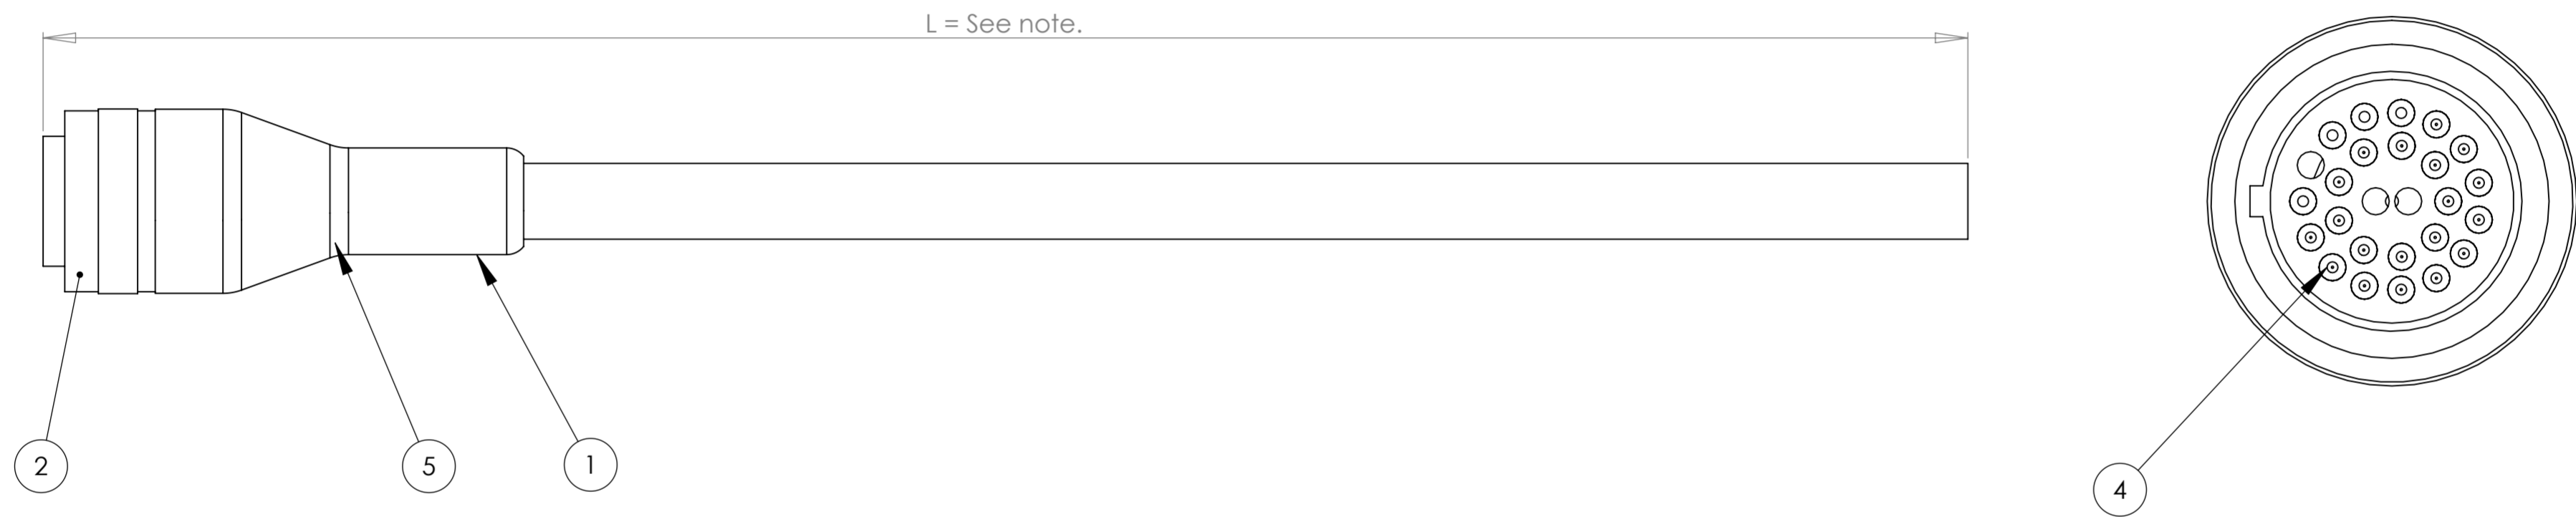

POS	ITEM No	DESCRIPTION	QTY.
1	52171070-2	Heat shrink boot	1
2	I0328	Connector 26 pole male	1
3	I0302	Pin 0,5-1,0mm2	4
4	I0329	Signal pin Souriau 0.35 - 0.5 mm2	19
5	11699198-301	Tape	1
6	I0330	Adapter shield M16 (19p)	1
7	I0530	CP/CS cable	1

Article	L =
P8147-40	4000mm

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material	Ämne / Blank
Tolerans / Tolerance:	ISO 2768-m	Värme behandling / Heat treatment	
Ytjämnhet / Surface roughness:	3.2	Ytbehandling / Surface coating	
Gradningsklass enligt / Burring class acc. to:	0.2x45°	Ritningsmätt gäller efter ytbehandl. / Meas. valid after coated surfaces	
Konstruerad av / Designed by:	MTh 2012-08-27	Benämning	
Ändrad av / Changed by:		Skala / Scale	
Godkänd av / Approved by:		1:1	
		Vikt / Weight	0,4 kg
		Format	A2
		Description	P8147
		Finamn / Filename	A0214-205A
		Dokument nr. / Document no.	P8147
		Ändr. / Alt.	A
		Blad / Sheet	1(1)

We reserve rights in this document and in the information contained therein. Reproduction, distribution and use without express authority is strictly forbidden. Robot System Products