

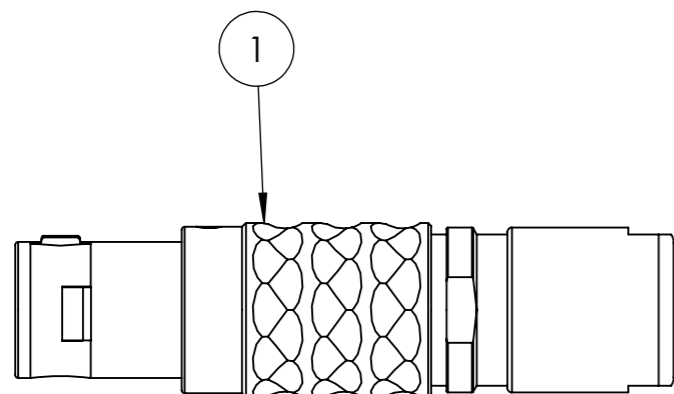


Elschema: E0214-227

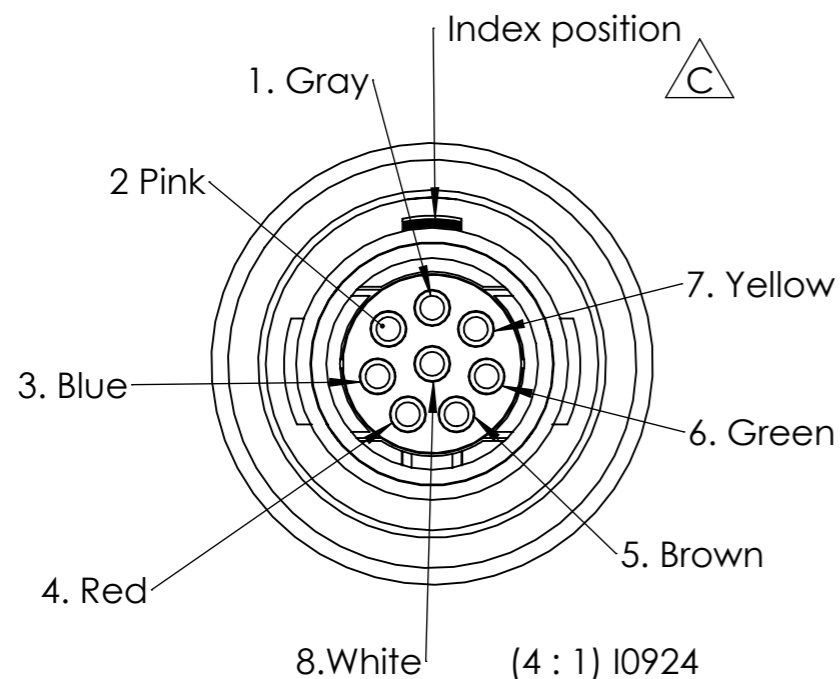

SKALAS 15mm

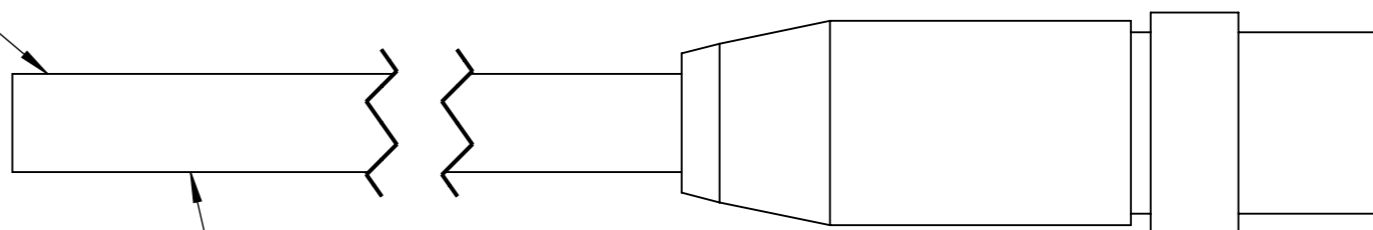

ITEM NO.	PART NUMBER	DESCRIPTION	Default/ QTY.
1	ODU S11LOC-P08NFG0-6200	I0924	1
2	Lumberg RSTS 8-299-2M	I0219	1

Där ej annat angivits gäller / Unless otherwise stated the following applies:

Tolerans / Tolerance: ISO 2768-m
 Ytjämnhet / Surface roughness: 6,3
 Gradningsklass enligt / Burring class acc. to: 0,3x45°
 Konstruerad av / Designed by: JO 2013-06-10
 Ändrad av / Changed by:
 Godkänd av / Approved by:

Material: Ämne / Blank
 Värme behandling / Heat treatment
 Ytbehandling / Surface coating: Ritningsmått gäller efter yfbehandl. / Meas. valid after coated surfaces

Robot	Cable lengt=L1	Sub
Fanuc M-20iA	1200	-12
Fanuc M-10iA, Motoman MH24	1500	-15
Fanuc M-10iD/8L	1800	-18
Fanuc M-10iA/8L	2000	-20



Benämning: SP/CS cable M12 (8) to ODU (8)
 Description: SP/CS cable
 Filnamn / Filename: A0214-227
 Dokument nr. / Document no.: P8153-XX
 Ändr. / Alt.: D
 Blad / Sheet: 1(1)



Skala / Scale: 1:1
 Vikt / Weight: 0,1 kg
 Format: A3

We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products