


We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products

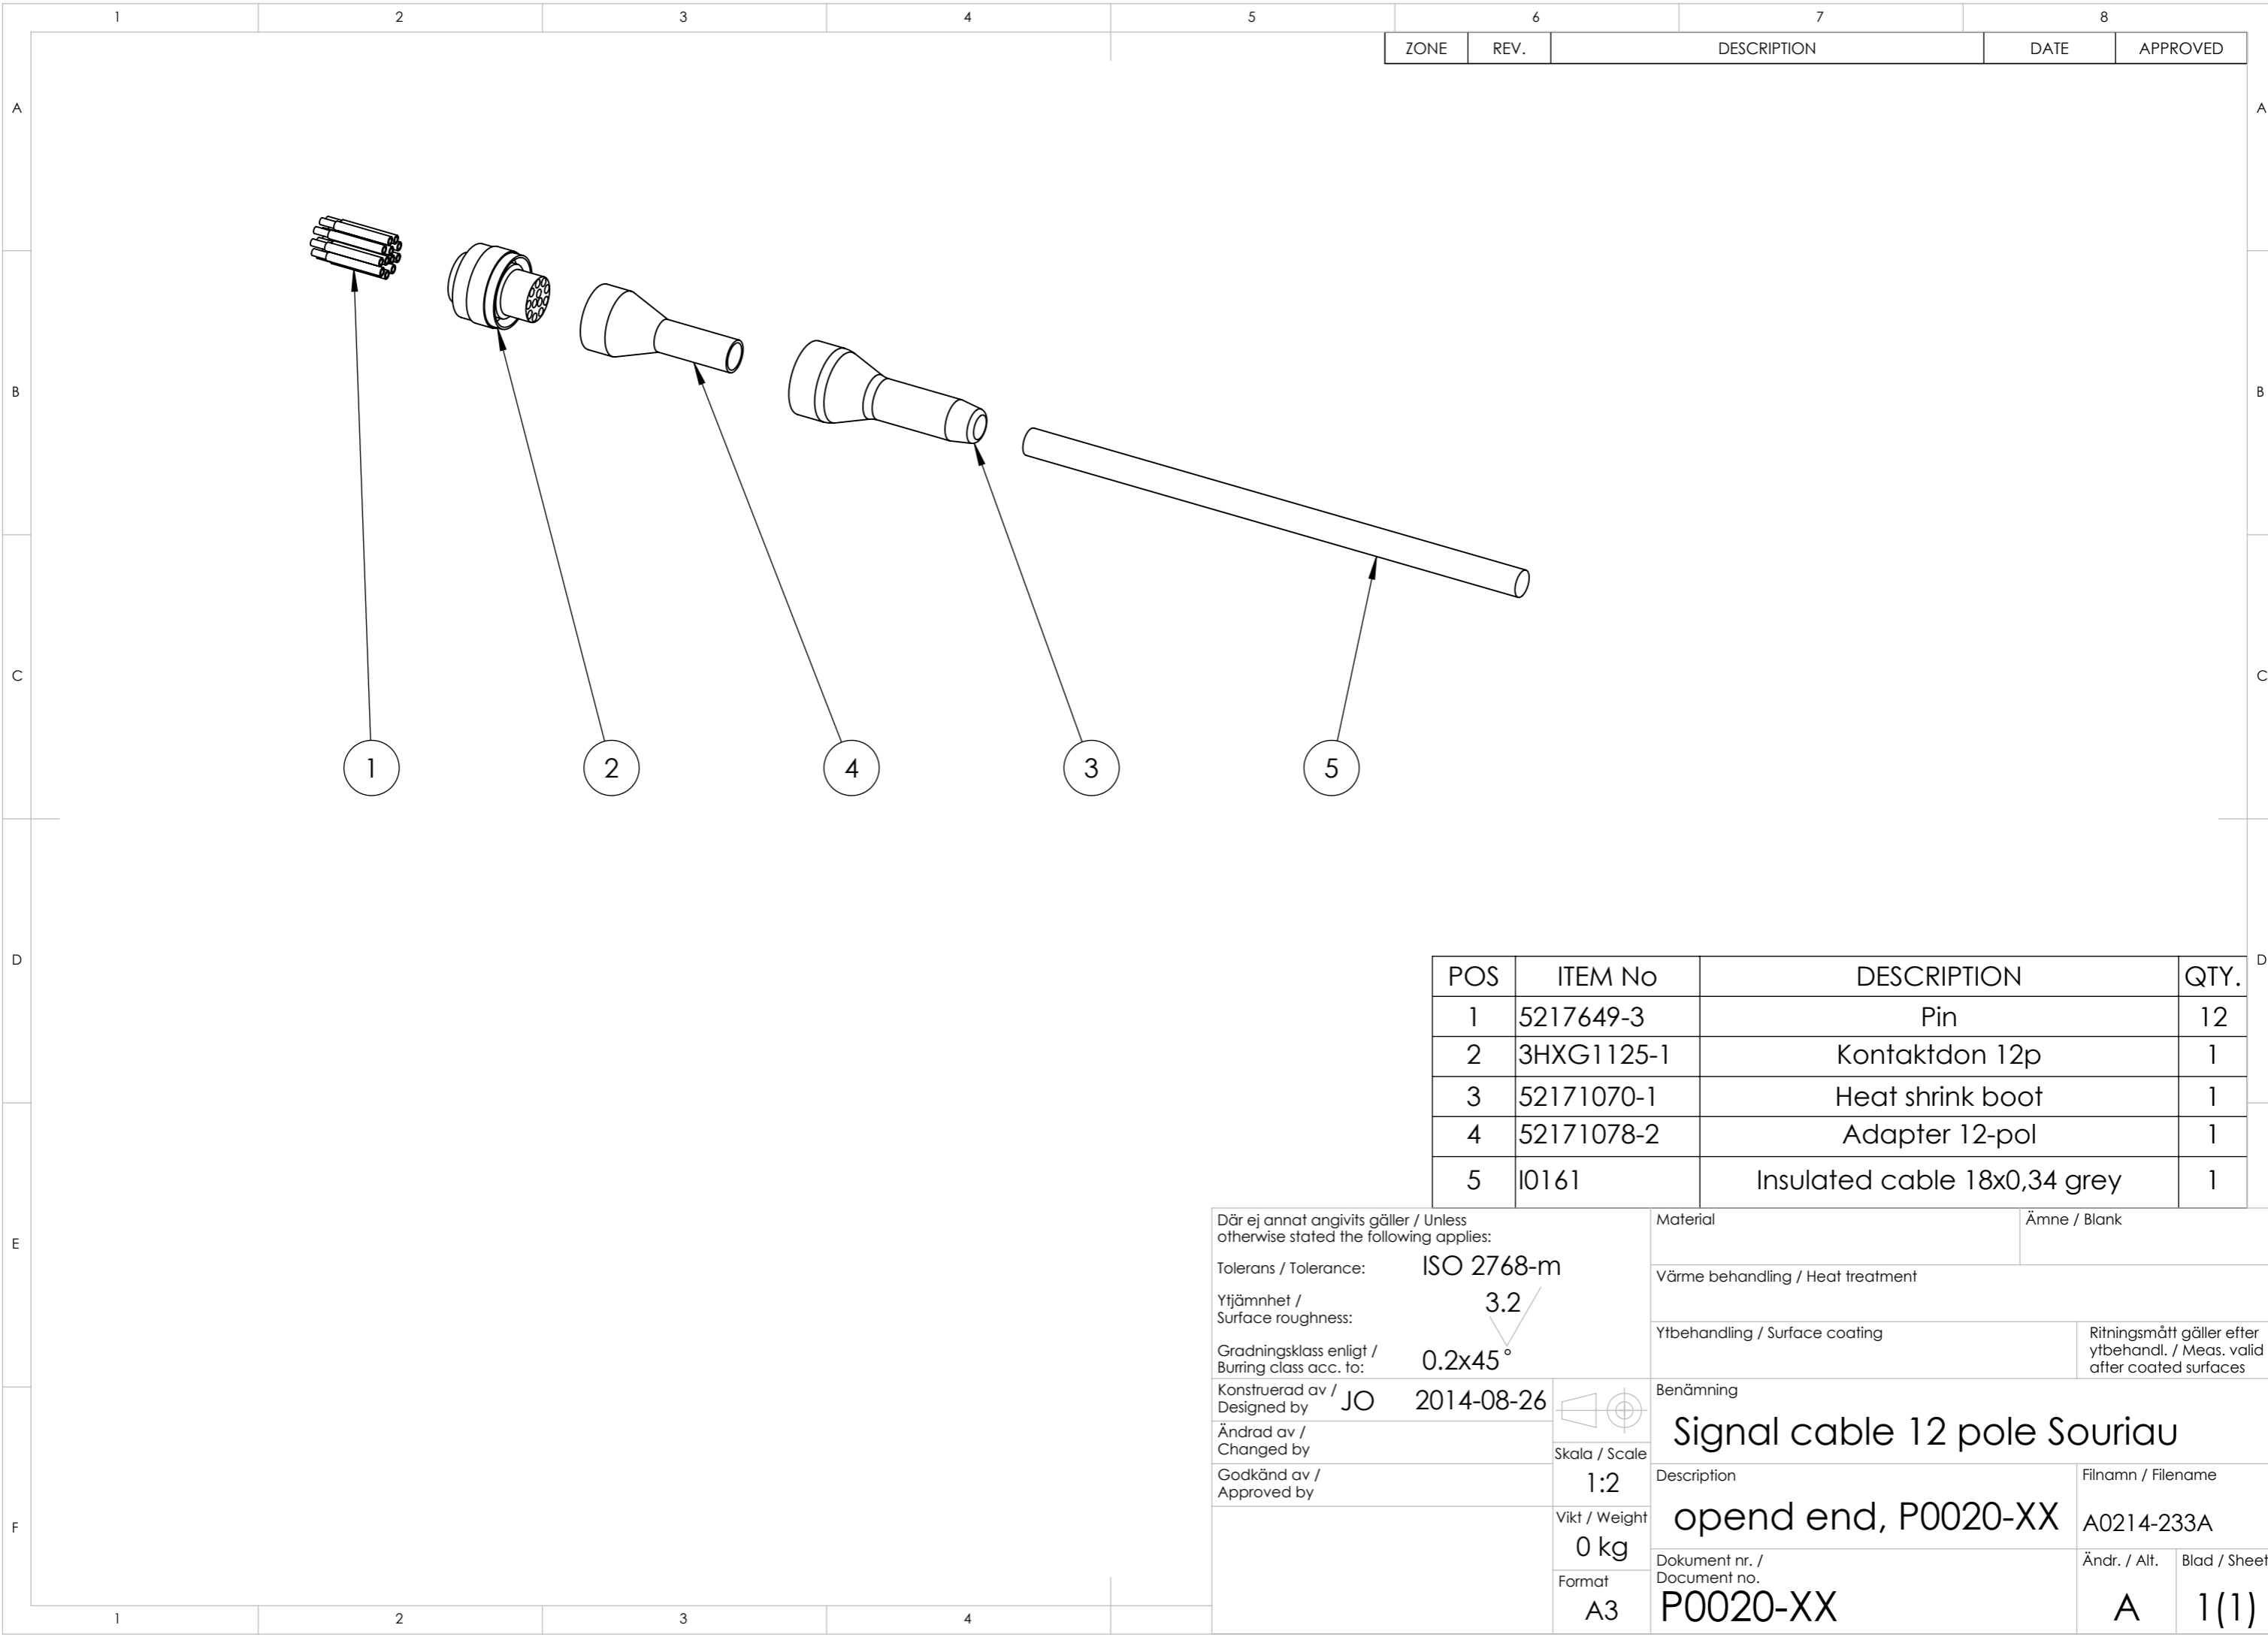

ZONE	REV.	DESCRIPTION	DATE	APPROVED
------	------	-------------	------	----------

POS	ITEM No	DESCRIPTION	QTY.
1	5217649-3	Pin	12
2	3HXG1125-1	Kontakt don 12p	1
3	52171070-1	Heat shrink boot	1
4	52171078-2	Adapter 12-pol	1
5	I0161	Insulated cable 18x0,34 grey	1

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material		Ämne / Blank	
Tolerans / Tolerance:	ISO 2768-m	Värme behandling / Heat treatment			
Ytjämnhet / Surface roughness:	3.2	Ytbehandling / Surface coating		Ritningsmått gäller efter ytbehandling. / Meas. valid after coated surfaces	
Gradningsklass enligt / Burring class acc. to:	0.2x45°	Benämning			
Konstruerad av / Designed by	JO 2014-08-26	Signal cable 12 pole Souriau			
Ändrad av / Changed by		Skala / Scale		Description	
Godkänd av / Approved by		1:2		opend end, P0020-XX	
		Vikt / Weight		Filnamn / Filename	
		0 kg		A0214-233A	
		Format		Dokument nr. / Document no.	
		A3		P0020-XX	
				Ändr. / Alt.	
				Blad / Sheet	
				A	
				1(1)	