


El-schema E0214-239

Circuit diagram E0214-239

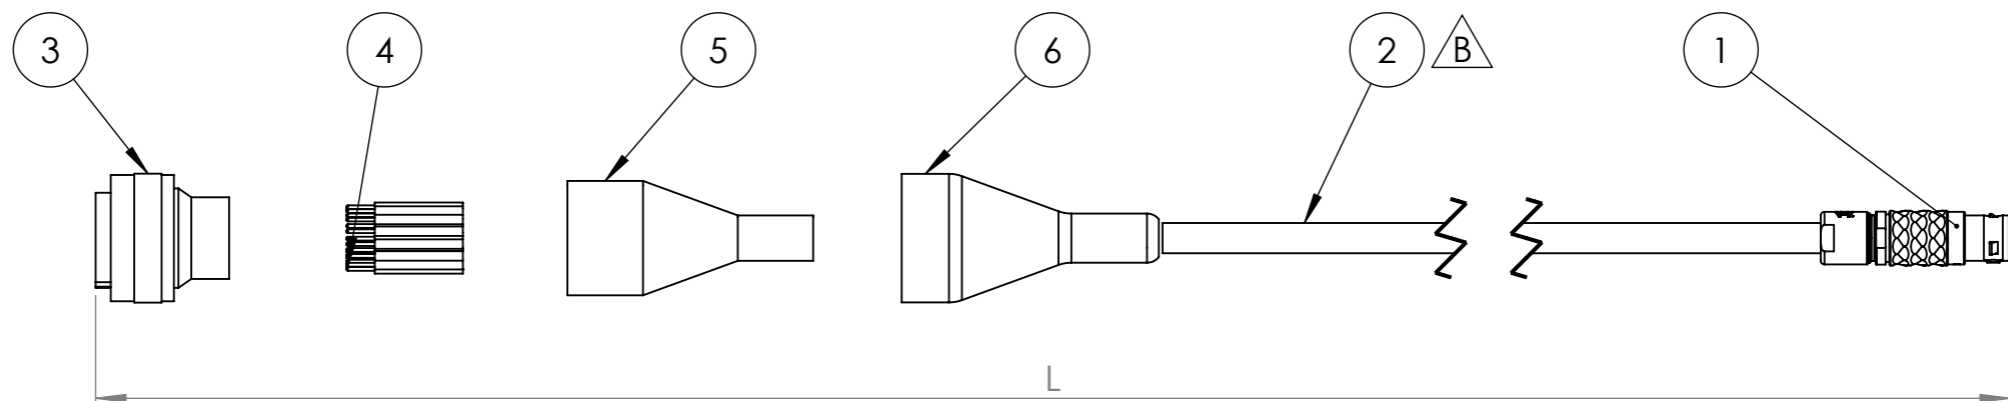

Robot	Length (L)	SUB (-XX)
IRB2600 ID	1600	16

ITEM NO.	Item_no	Description_1	Assembly drawing/QTY.
1	I1155	Mini-snap cable connector 19 pole	1
2	I1383	Elproflex cable, 25 conductors	1
3	I0328	Connector 26 pole male	1
4	I0329	Signal pin	18
5	I0330	Shield adapter	1
6	52171070-2	Shrink boot	1

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material	Ämne / Blank
Tolerans / Tolerance:	ISO 2768-m	Värme behandling / Heat treatment	
Ytjämnhet / Surface roughness:	3.2	Ytbehandling / Surface coating	Ritningsmått gäller efter ytbehandling. / Meas. valid after coated surfaces
Gradningsklass enligt / Burring class acc. to:	0.2x45°	Benämning	
Konstruerad av / Designed by	JO 2015-04-27	Signal cable 23P - ODU 19 pole	
Ändrad av / Changed by		Skala / Scale	Filnamn / Filename
Godkänd av / Approved by		1:2	P8176-XX
		Vikt / Weight	0,1 kg
		Format	A3
		Dokument nr. / Document no.	P8176-XX
		Ändr. / Alt.	B
		Blad / Sheet	1(1)

We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products