


Circuit diagram: E0240-054

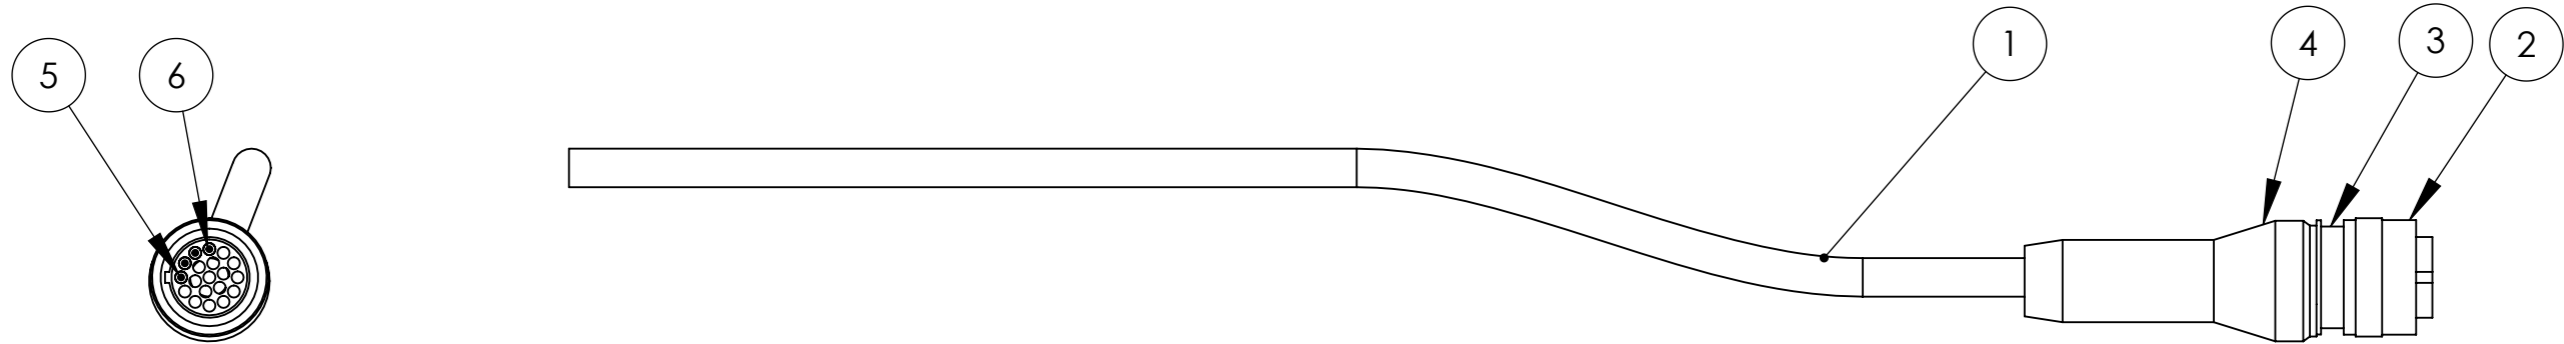

POS	ITEM No	DESCRIPTION	QTY.
1	I0548	CP-Cable (4x1,5+4x0,5)	1
2	5217649-109	Contact 19-pin	1
3	I0330	Adapter 19p	1
4	52171070-1	Shrink shroud, straight	1
5	5217649-27	Signal pin 0,5-1,5mm2	3
6	5217649-31	Crimp Ground Pin	1

Sub no.	L = Length (mm)
-15	1500

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material	Ämne / Blank
Tolerans / Tolerance:		Värme behandling / Heat treatment	
Ytjämnhet / Surface roughness:		Ytbehandling / Surface coating	
Gradningsklass enligt / Burring class acc. to:		Ritningsmått gäller efter ytbehandl. / Meas. valid after coated surfaces	
Konstruerad av / Designed by	MTh 2010-04-21	Benämning	
Ändrad av / Changed by		Skala / Scale	
Godkänd av / Approved by		1:2	
Vikt / Weight		P8121	
Format		A3	
Description		P8121	
Filnamn / Filename		A0240-054A	
Dokument nr. / Document no.		P8121	
Ändr. / Alt.		A	
Blad / Sheet		1(1)	

We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products