
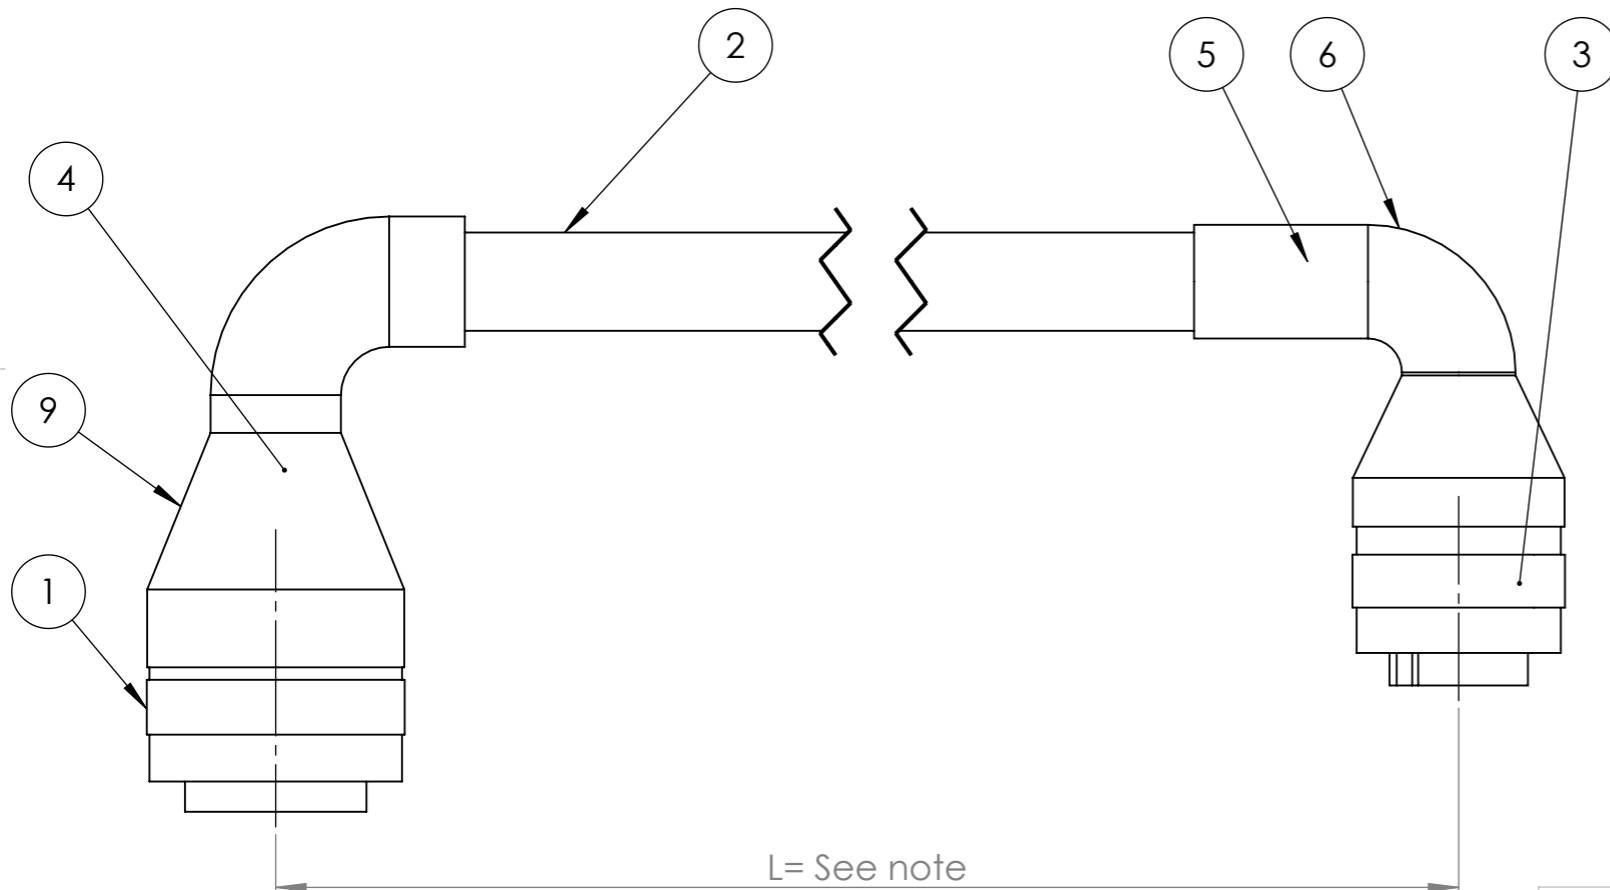


1	2	3	4	5	6	7	8
ZONE	REV.	DESCRIPTION			DATE	APPROVED	

Circuit diagram: E0240-063

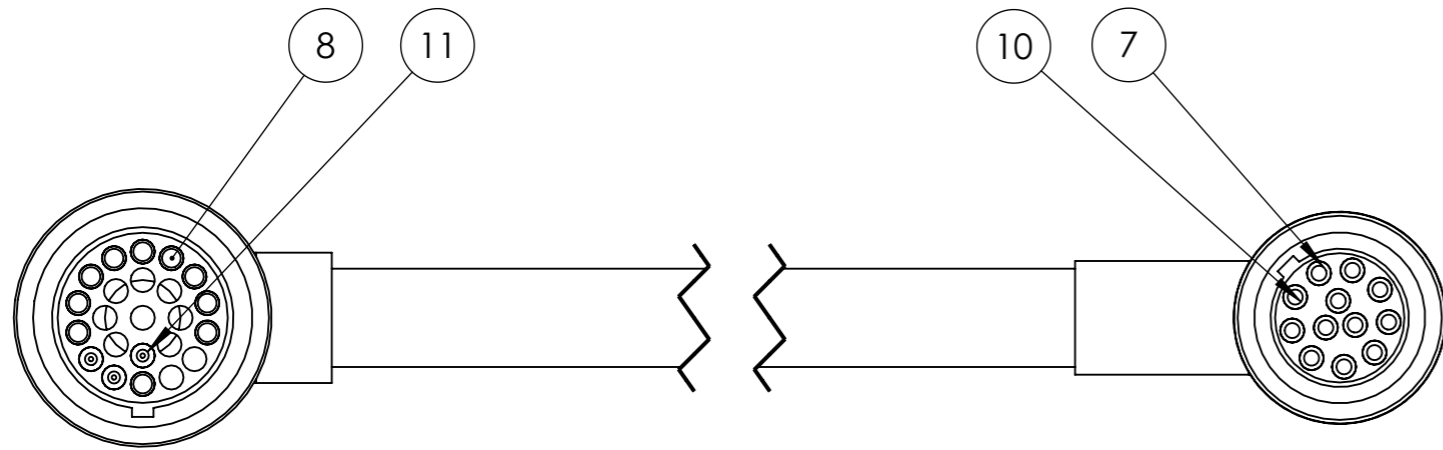

NOTE!
Item 3, 5 and 6 to be delivered in attached plastic bag.

POS	ITEM No	DESCRIPTION	QTY.
1	3HAA2602-3	Connector 23P UTO CM	1
2	I0546	Cable CP/CS/CBUS	1
3	3HAA2600-2	Connector 12S UTO CM	1
4	I0485	Shield adapter	1
5	I0484	Shielded adapter	1
6	52171032-4	Shrink hose angeled	1
7	5217649-4	Socket	10
8	5217649-3	Pin	10
9	52171032-5	Heat shrink boot angled	1
10	5217649-28	Socket 0,5mm2 - 1,5mm2	2
11	5217649-27	Signal pin 0,5-1,5mm2	3

We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products

Article no.	L= (mm)
P8143-30	3000

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material	Ämne / Blank	
Tolerans / Tolerance:	ISO 2768-m	Värme behandling / Heat treatment		
Ytjämnhet / Surface roughness:	6,3	Ytbehandling / Surface coating	Ritningsmått gäller efter ytbehandling. / Meas. valid after coated surfaces	
Gradningsklass enligt / Burring class acc. to:	0,3 x 45°	Benämning		
Konstruerad av / Designed by	MTh 2012-03-05	Skala / Scale	Profibus	
Ändrad av / Changed by				
Godkänd av / Approved by		Vikt / Weight	Description	
		0,1 kg	Signal cable 23P-12S	
		Format	Dokument nr. / Document no.	
		A3	P8143	
			Filnamn / Filename	
			A0240-068A	
			Ändr. / Alt.	Blad / Sheet
			A	1(1)