
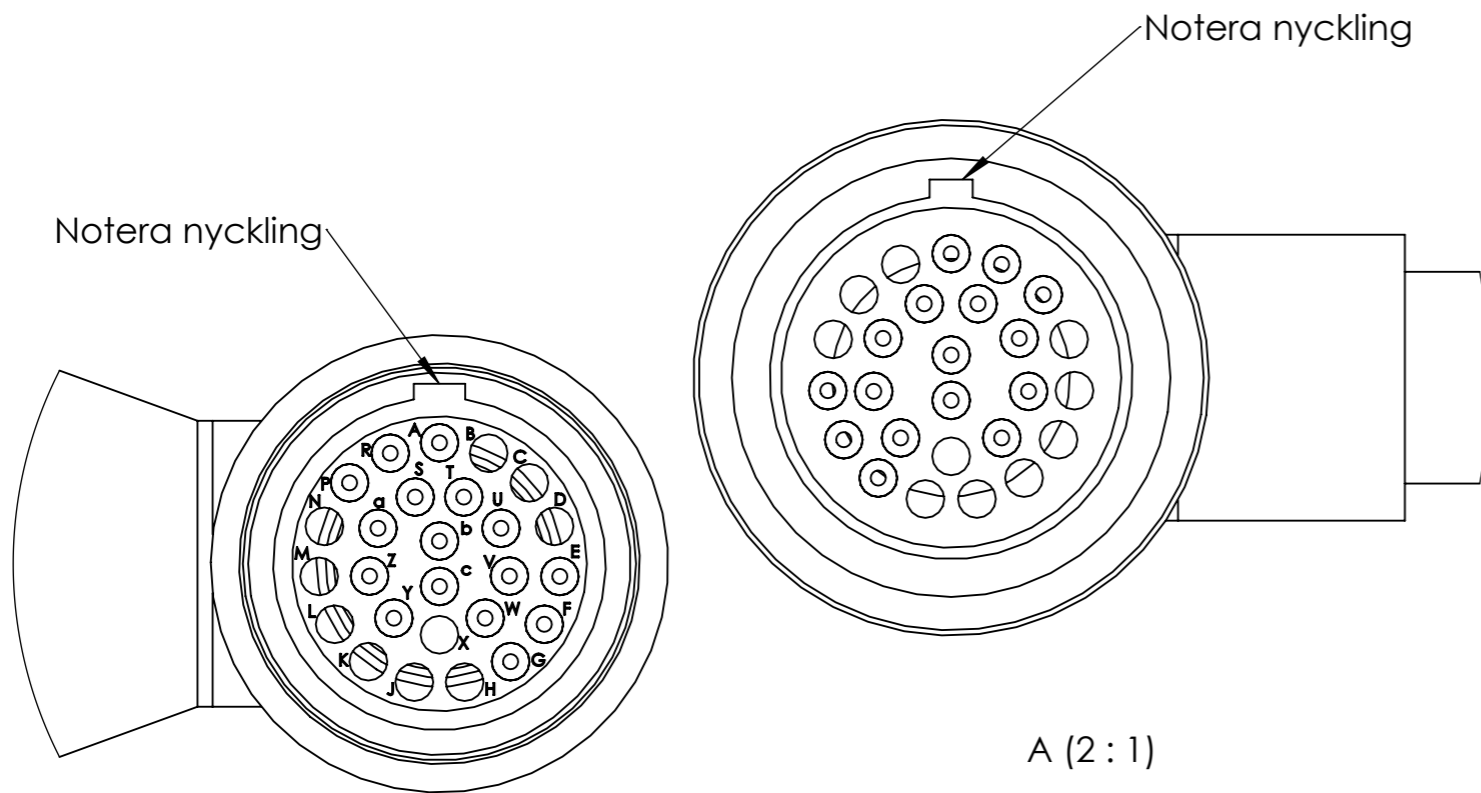
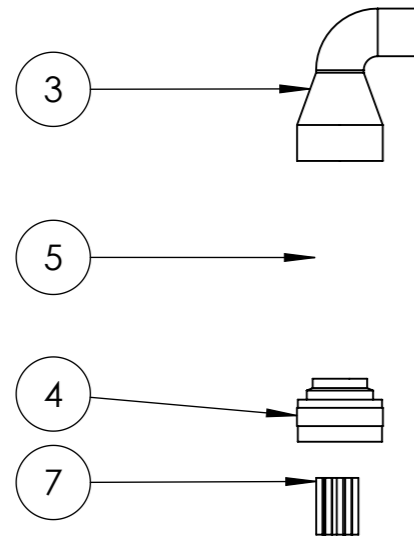


El drawing: E0240-154

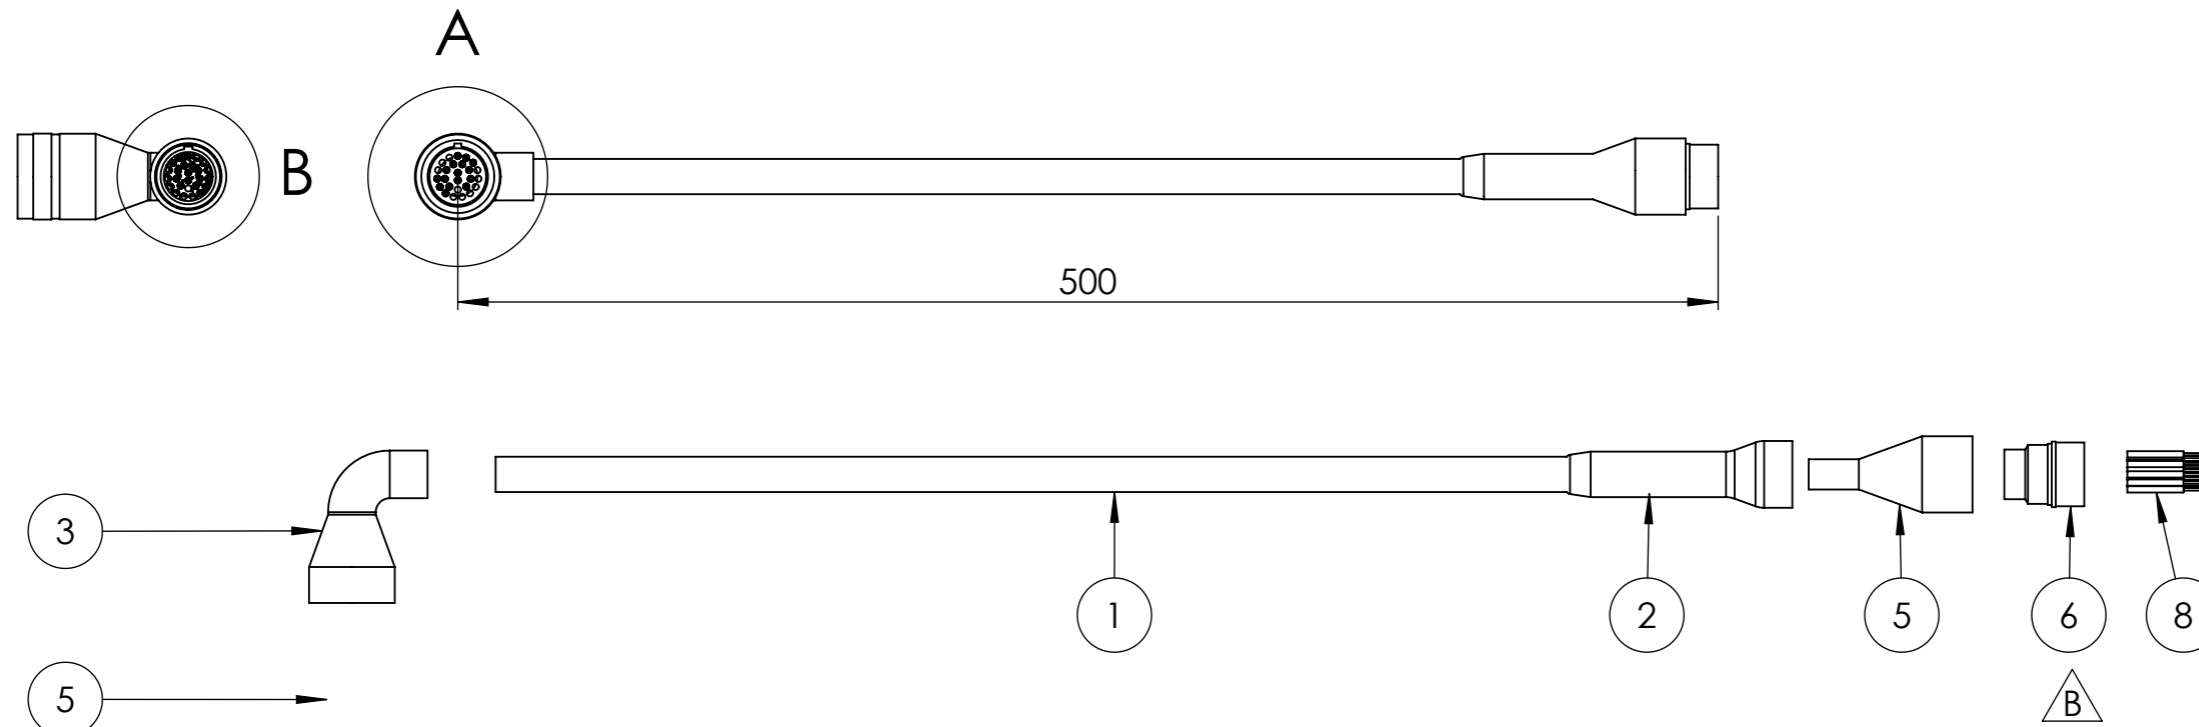

POS.	Item No	Description_1	QTY.
1	I0081	Robot cable 25x0,75mm2	1
2	52171070-1	Shrink boot, straight	1
3	52171032-5	Heat shrink boot 90°	1
4	I1073	Connector 26S UTOW CM	1
5	I0330	Shield adapter	2
6	P0240-002	Souriau 26-pole Male	1
7	I0305	Socket	16
8	I0302	Pin 0,5-1,0mm2	16

Där ej annat angivits gäller / Unless otherwise stated the following applies:		Material	Ämne / Blank
Tolerans / Tolerance: ISO 2768-m		-	-
Ytjämnhet / Surface roughness: 6,3		Värme behandling / Heat treatment	-
Gradningsklass enligt / Burring class acc. to: 0,3x45°		Ytbehandling / Surface coating	Ritningsmått gäller efter ytfbehandling. / Meas. valid after coated surfaces
Konstruerad av / Designed by: JoM 2016-05-04		Benämning: TC-500 90° adapter	
Ändrad av / Changed by:		Description	
Godkänd av / Approved by:		Filnamn / Filename: A0240-110A	
Vikt / Weight: 0,1 kg		Dokument nr. / Document no.:	
Format: A3		P8190-5	
		Ändr. / Alt.:	Blad / Sheet:
		B	1(1)

We reserve rights in this document and in the information contained therein. Reproduction use or disclosure to third parties without express authority is strictly forbidden. Robot System Products